

Resit exam EE2S31 SIGNAL PROCESSING

July 27, 2021

Block 1: Stochastic Processes (13:30-15:00)

Open book, strictly timed take-home exam. (Electronic) copies of the book and the course slides allowed. No other tools except a basic pocket calculator permitted.

Upload answers during 14:55–15:10

This block consists of three questions (25 points); more than usual, and this will be taken into account during grading. Answer in Dutch or English. Make clear in your answer how you reach the final result; the road to the answer is very important. Write your name and student number on each sheet.

Hint: Avoid losing too much time on detailed calculations, write down the general approach first.

Question 1 (9 points)

X and Y have the joint PDF

$$f_{X,Y}(x,y) = \begin{cases} c(y-x) & \text{for } 0 \leq x \leq y \leq 1 \\ 0 & \text{otherwise.} \end{cases}$$

- (a) Find the constant c .
- (b) What is $f_X(x)$ and $f_Y(y)$.
- (c) Are X and Y independent?
- (d) What is $f_{X|Y}(x|y)$.
- (e) What is the blind estimate, \hat{x}_B .
- (f) What is $\hat{x}_M(y)$, the MMSE estimate of X given $Y = y$.
- (g) What is $\hat{x}_{\text{MAP}}(y)$, the maximum a posteriori estimator for X given $Y = y$.

Question 2 (7 points)

It is known that if U is standard normal distributed then $Z = U^2$ is Chi-square distributed (with 1 degree of freedom), and that its moment generating function (MGF) is given by

$$\phi_Z(s) = \frac{1}{\sqrt{1-2s}}, \quad \text{ROC: } s < \frac{1}{2}.$$

Let X and Y be independent standard Gaussian variables (i.e., mean 0, variance 1). In this question, we aim to find the MGF of their product, $V = XY$.

- (a) Compute the mean and the variance of $X + Y$ and of $X - Y$.

- (b) Derive the PDF of $X + Y$ and of $X - Y$.
- (c) Show that $X + Y$ is independent of $X - Y$.
- (d) Derive that the MGF of $W = (X + Y)^2$ is


$$\phi_W(s) = \frac{1}{\sqrt{1-4s}}.$$

- (e) Derive the MGF of the product $V = XY$.

Hint: First write $XY = \frac{1}{4}(X+Y)^2 - \frac{1}{4}(X-Y)^2$.

Question 3 (9 points)

Consider the following system:

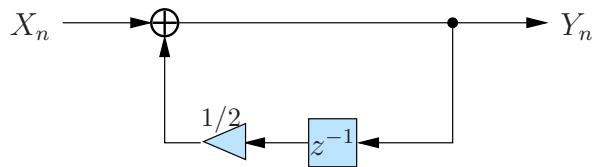

The input signal is an iid Gaussian random process X_n , with mean $\mu_X = 2$ and variance $\sigma_X^2 = 3$.

The output Y_n satisfies the recursion $Y_n = \frac{1}{2}Y_{n-1} + X_n$.

- (a) Determine the autocorrelation sequence of the input, $R_X[k]$, as well as its power spectral density, $S_X(\phi)$.
- (b) Compute $E[Y_n]$.

The autocovariance sequence of the output is

$$C_Y[k] = \frac{4}{3} \left(\frac{1}{2}\right)^{|k|} \sigma_X^2.$$

- (c) Compute the autocorrelation sequence $R_Y[k]$ of the output.
- (d) What is the average output power?
- (e) Determine the power spectral density of the output, $S_Y(\phi)$.
- (f) Compute $P[Y_n > 8]$.

Note: See Table 4.1 or 4.2 (page 129/130) for $\Phi(z)$ or $Q(z)$.

See Table 3 (Suppl. page 38) for Discrete-Time Fourier Transform pairs.

Resit exam EE2S31 SIGNAL PROCESSING**July 27, 2021****Block 2 (15:25-16:55)**

Open book, strictly timed take-home exam. (Electronic) copies of the book and the course slides allowed. No other tools except a basic pocket calculator permitted.


Upload answers during 16:50–17:05

This block consists of three questions (25 points); more than usual, and this will be taken into account during grading. Answer in Dutch or English. Make clear in your answer how you reach the final result; the road to the answer is very important. Write your name and student number on each sheet.

Question 4 (9 points)

Let us consider the sampling of an amateur radio signal broadcast in the band 3.5-4.0 MHz!

(1 p) (a) Using the graphic in Figure 1 (Figure 6.4.3 from the book), determine the ranges of all possible sampling frequencies that won't result in destructive aliasing! Report your answer by indicating the ranges on the graphic! (You can do this on your computer, or you can sketch this graphic by hand on your answer sheet or use a printed copy of this figure if you have one)

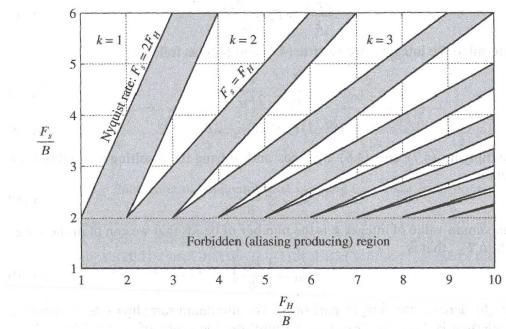**Figure 1**

(2 p) (b) Determine the value of a possible sampling frequency which will convert the signal down to baseband, i.e. to 0-0.5 MHz!

Let us assume that our digital radio receiver samples the radio signal at 1.1025 MHz. After digital demodulation of the baseband signal, we now have a digital audiosignal with a spectrum shown on Figure 2. (Note: there is also noise over the whole spectrum, but this noise is not shown in the figure, only the desired part of the signal.) We want to write this signal onto a CD with sampling rate 44.1 kHz. In order to do that, we first have to downsample the audio signal.

(2 p) (c) Sketch the block diagram of a two-stage downampler for this task and explain the purpose of each block!

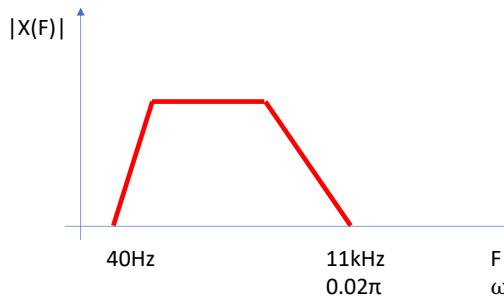


Figure 2

(1 p) (d) What are the decimation factors of each phase in this downampler?

(2 p) (e) Give the specification of the first filter in your system, in terms of pass/stop/transition band and explain your choice!

(1 p) (f) What is the advantage of this solution over single-stage downsampling?

Question 5 (8 points)

Consider a digital signal $y[n]$ that is the result of filtering the sequence $x[n] = [1, 0, 2, 0, -1, 0, 3, 0]$ using a digital filter with impulse response $h[n] = [3, 2, 1, 2]$.

(2 p) (a) Compute the values of $y[n]$ in the time domain! Note: Indicate each step of your computations. Without clear intermediate steps, the end result will not be accepted!

(2 p) (b) How can you calculate $y[n]$ in the frequency domain? Write down the steps of the method (no need to make calculations)

(2 p) (c) Determine the 8-point DFT of $x[n]$!

(2 p) (d) Which of the above approaches (time domain or frequency domain) is better in terms of computational complexity (assuming that the DFT matrices are known) for a sequence and a filter of this length, in general?

Question 6 (8 points)

Given a multirate conversion system with a block scheme shown in Figure 3 with $L=2$ and $M=5$. The sampling rate at the input is 100Hz. The amplitude spectrum $|X(\omega)|$ of the input signal $x[n]$ is depicted in Fig. 4.

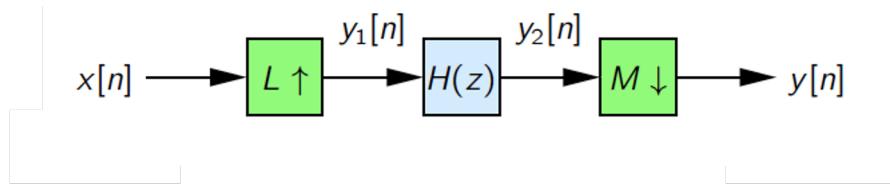


Figure 3




Figure 4

2p (a) Give a formula for $Y_1(\omega)$ in terms of $X(\omega)$ and draw a graphic for the amplitude spectrum $|Y_1(\omega)|$!

Let us consider the implementation of the conversion system shown in Fig. 5.

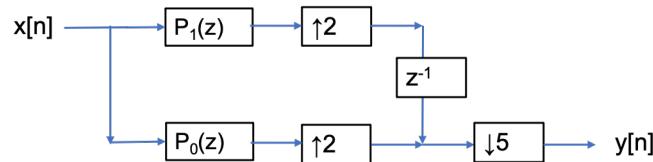


Figure 5

2p (b) What is the role of the filters $P_i(z)$ and how are they related to $H(z)$?

1p (c) At which rate do the filters operate in this implementation?

3p (d) Draw an alternative, more efficient implementation of the multirate conversion system (in terms of the rate at which the filters operate!) At which rate do the filters operate now?